

Contacting CyberData

Corporate Headquarters

CyberData Corporation  
3 Justin Court  
Monterey, CA 93940, USA

Phone: 831-373-2601  
Fax: 831-373-4193  
<https://www.cyberdata.net/>

Sales: 831-373-2601 ext. 334  
Support: 831-373-2601 ext. 333  
Support Website: <https://support.cyberdata.net/>  
RMA Department Contact and Status: <https://support.cyberdata.net/>  
Warranty Information: <https://support.cyberdata.net/>


Installation Quick Reference  
SIP Outdoor Call Button  
SIP Compliant  
011491



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address <sup>a</sup>	192.168.1.23
Web Access Username	admin
Web Access Password	admin
Subnet Mask <sup>a</sup>	255.255.255.0
Default Gateway <sup>a</sup>	192.168.1.1

a. Default if there is not a DHCP server present.

Typical System Installation

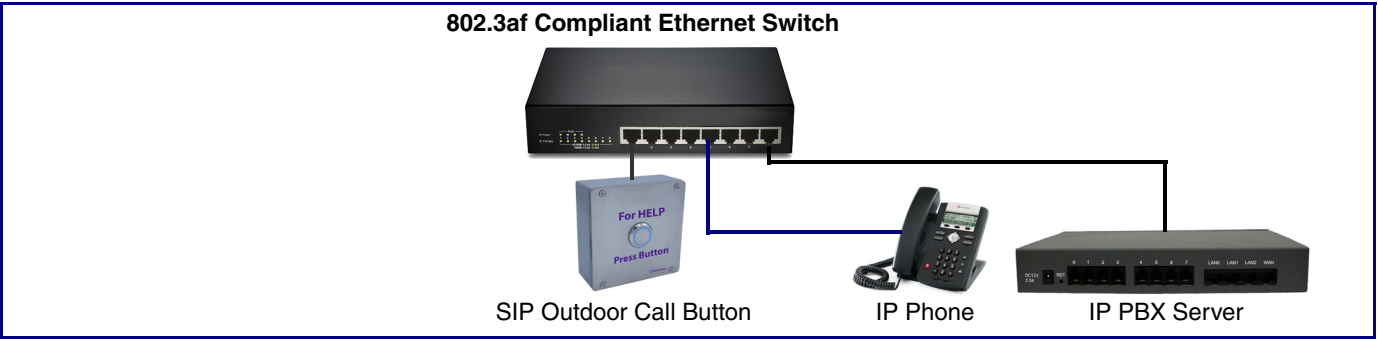


Getting Started

- Download the *SIP Outdoor Call Button Operations Guide* PDF file, from the SIP Outdoor Call Button product page at: <https://www.cyberdata.net/products/011491>
- Create a plan for the locations of your SIP Outdoor Call Buttons.
- **WARNING:** This product should be installed by a licensed electrician according to all local electrical and building codes.
- **WARNING:** To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation instructions.
- **WARNING:** The PoE connector is intended for intra-building connections only and does not route to the outside plant.
- **WARNING:** This enclosure is not rated for any AC voltages!


Parts

Accessory Kit	Optional Accessories (for gooseneck mounting)	Optional Accessories	Sold Separately
(4) Phillips Screws (4) Security Torx Screws Mounting Component Security Torx Key	(4) Carriage bolt nuts (4) Carriage bolts (4) Carriage bolt washers	(1) 531085* Hole plug assembly	(1) 1/2-inch EMT compression connector with extra sealing locknut


Dimensions

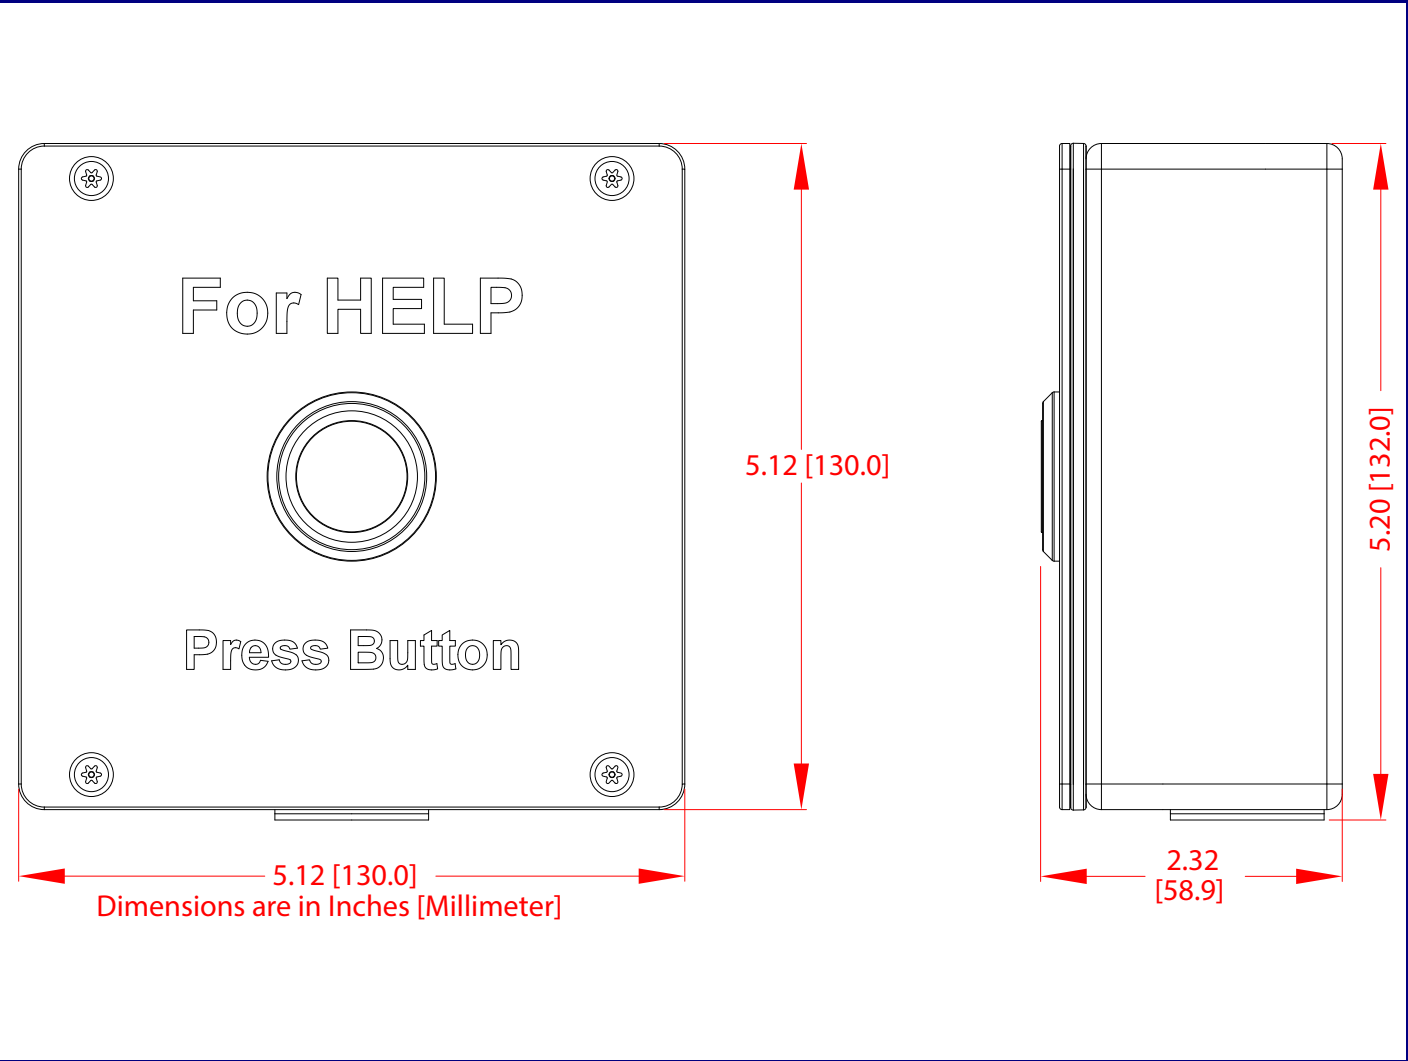

Terminal Block Connections

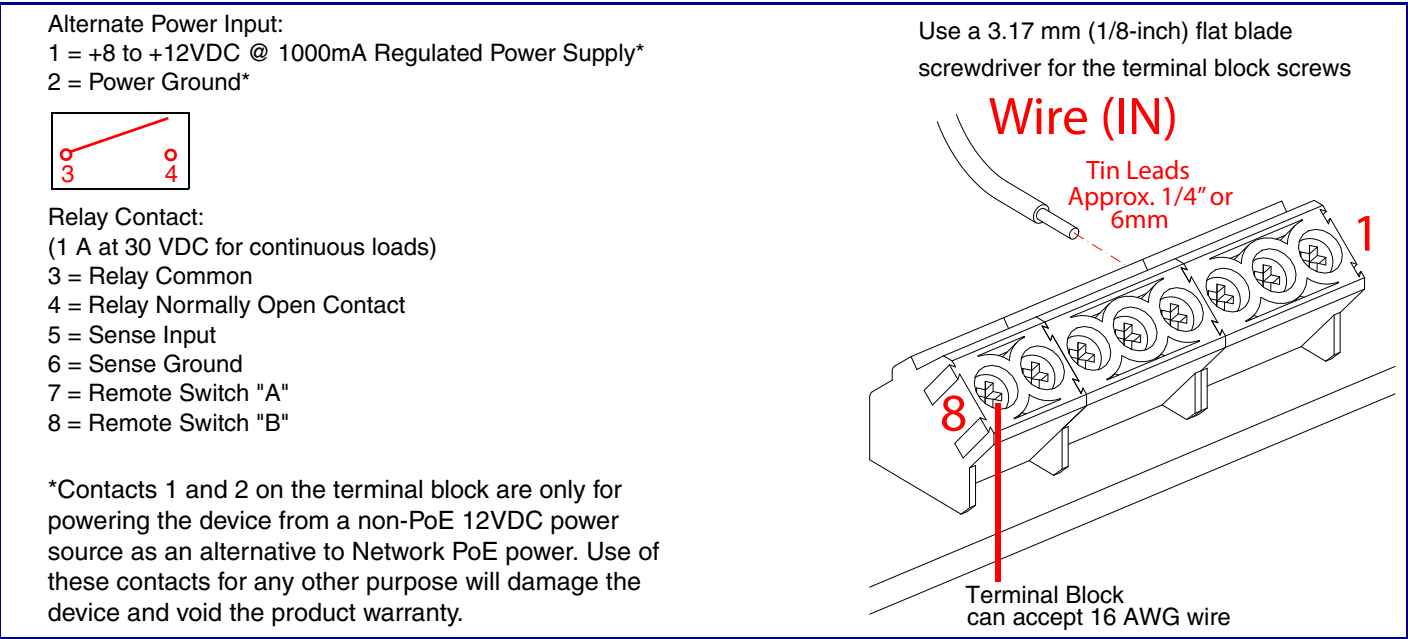

RTFM Button

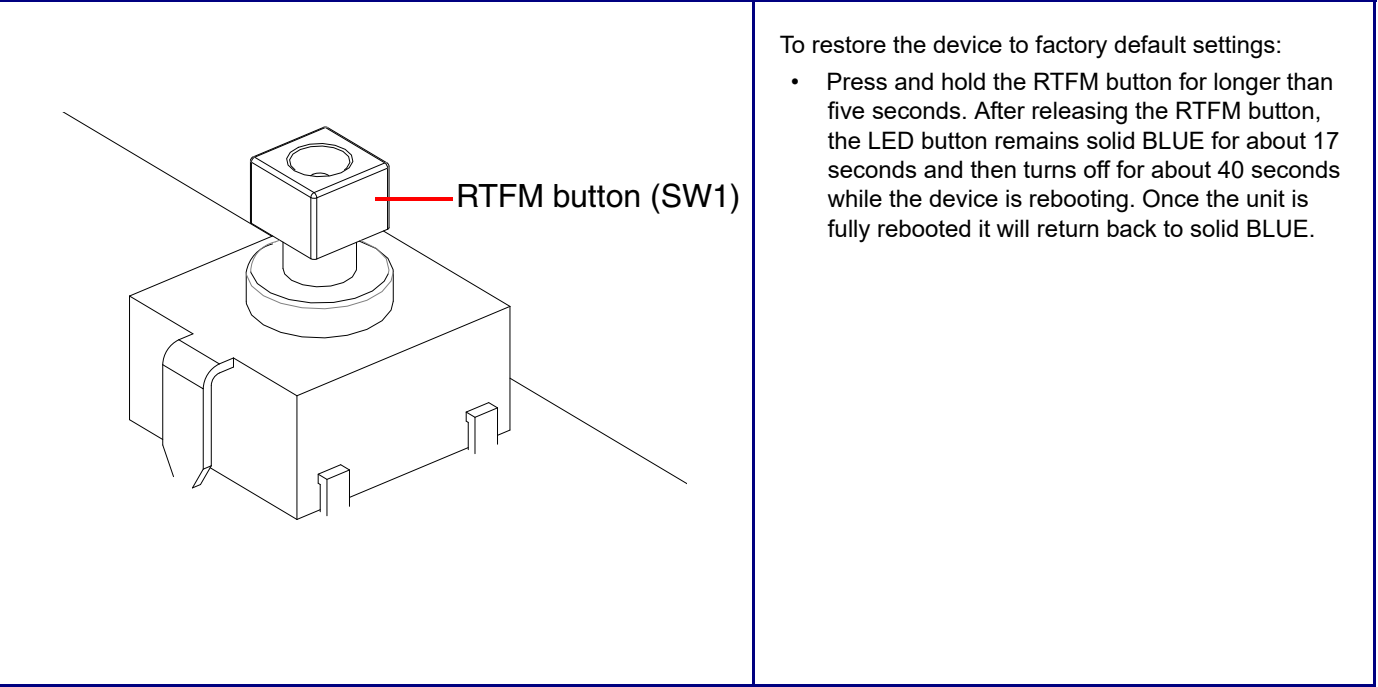

Wall Mounting Options

