


Grommes~Precision PST Series Amplifier

SIP Paging Adapter Connections

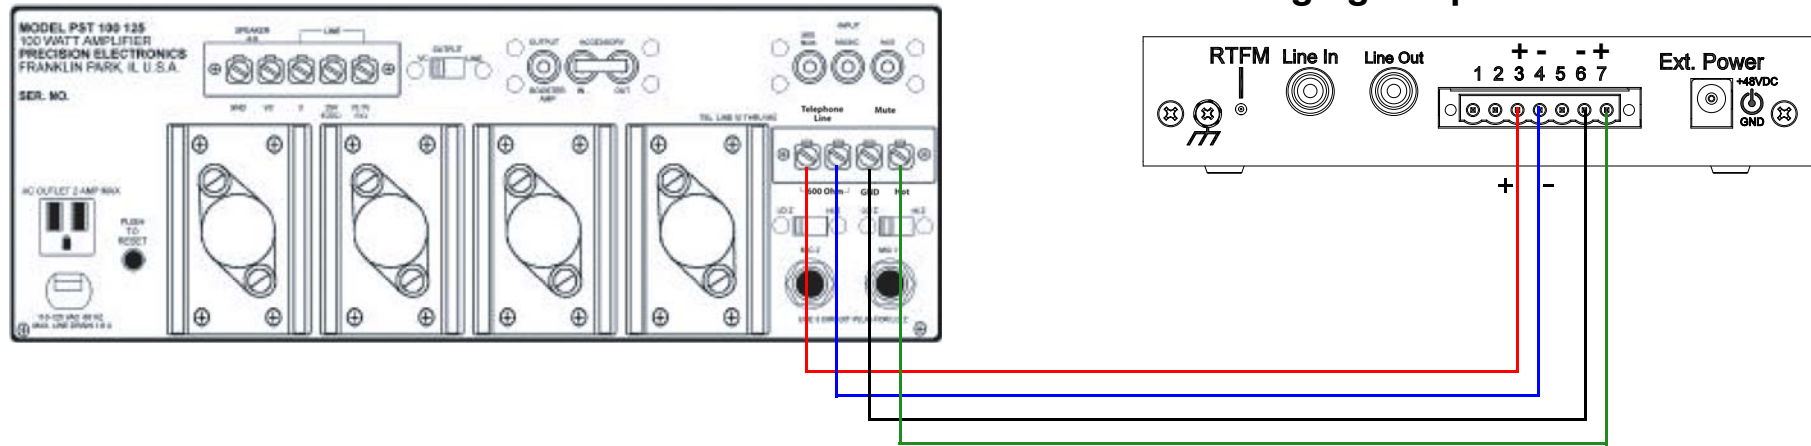

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

Notes:

CyberData SIP Paging Adapter's Page Port output connects to the TELEPHONE LINE input on the Grommes~Precision PST Series Amplifier.

The SIP Paging Adapter's normally open relay contacts can be used to mute background music. Connect the normally open and common wires to the MUTE and GND screw terminals per the diagram. Be sure to check Enable relay on local audio on the Device Configuration page of the web interface for contact closure on page.

2 conductor, shielded speaker wire is recommended.