


### Bogen ZPM3-9 Amplifier

### V3 Paging Server Connections

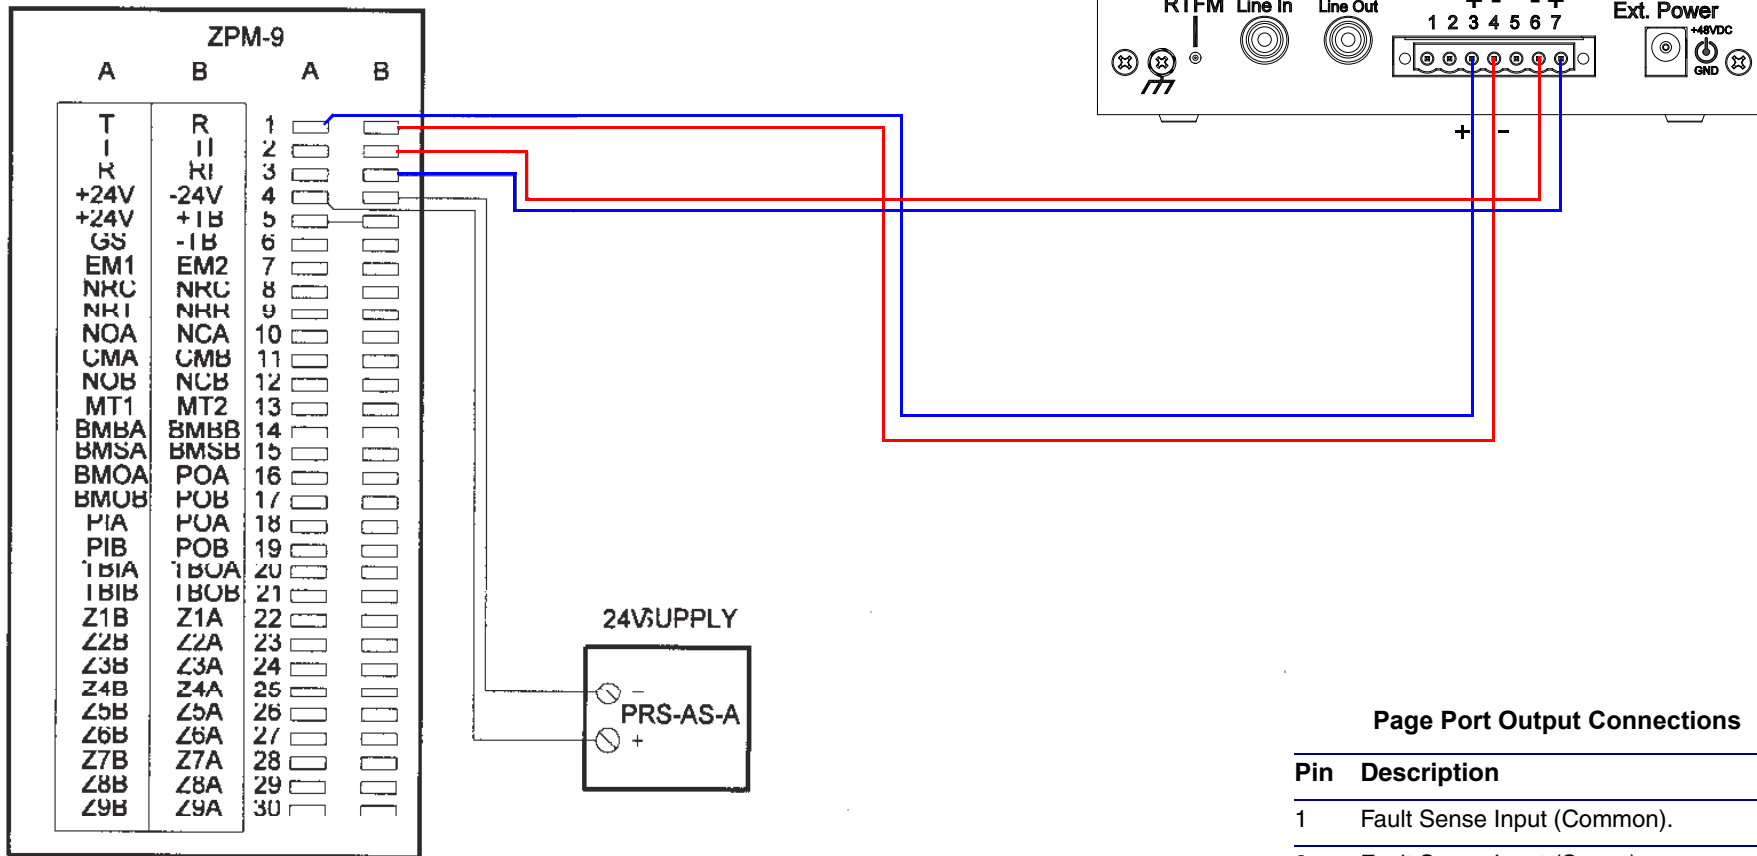

#### Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output <sup>a</sup>
4	Negative 600-Ohm Audio Output <sup>a</sup>
5	Audio Ground Reference.
6	Relay Contact - Common <sup>b</sup>
7	Relay Contact - Normally Open <sup>b</sup>

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.  
 b. 1 Amp at 30 VDC for continuous loads.

#### Notes

The CyberData V3 Paging Server connects to the Bogen ZPM-9 as a Page Port per Figure 4 on page 3 of the ZPM-9 operation guide.

It will be necessary to use the V3 Paging Server's normally open relay contacts in addition to the Page Port (600 Ohms) audio output. When using the relay, check the box to **Enable Relay on Local Audio** on the **Device Configuration** page of the web interface.

DTMF pass-thru is supported. However, passing DTMF tones through the Page Port and RCA Line Level outputs is NOT supported when Buffer SIP Calls is enabled for delayed paging.

2-conductor, shielded speaker wire is recommended.