

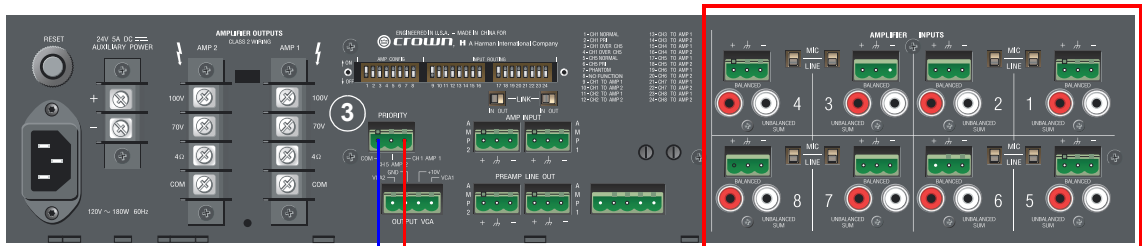


### Crown 180MA/280MA/1160MA Amplifier

①

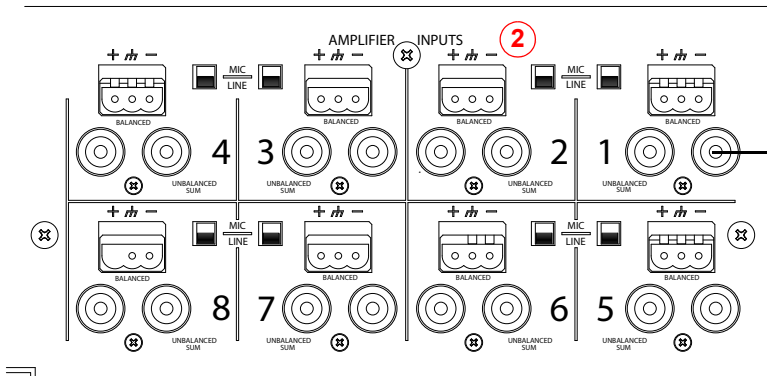

### V3 Paging Server Connections

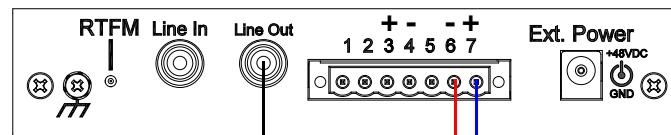

④

#### Notes

1. CyberData V3 Paging Server's RCA line level output can connect to any of the eight **LINE** inputs on the Crown 180MA/280MA/1160MA amplifier.
2. Move the **MIC/LINE** switch to the **LINE** position for the respective input.
3. Connect the V3 Paging Server's relay contact terminals to **COM** and **CH1 AMP1** for mute control over all other amp music channels. When using contact closure, check the box to **Enable relay on local audio** on the **Device Configuration** page of the web interface.
4. 2-conductor, shielded speaker wire terminated with RCA male connectors is recommended.