CyberData
The IP Endpoint Company

Valcom Page Pac 6 Amplifer to SIP Paging Server Connections

Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

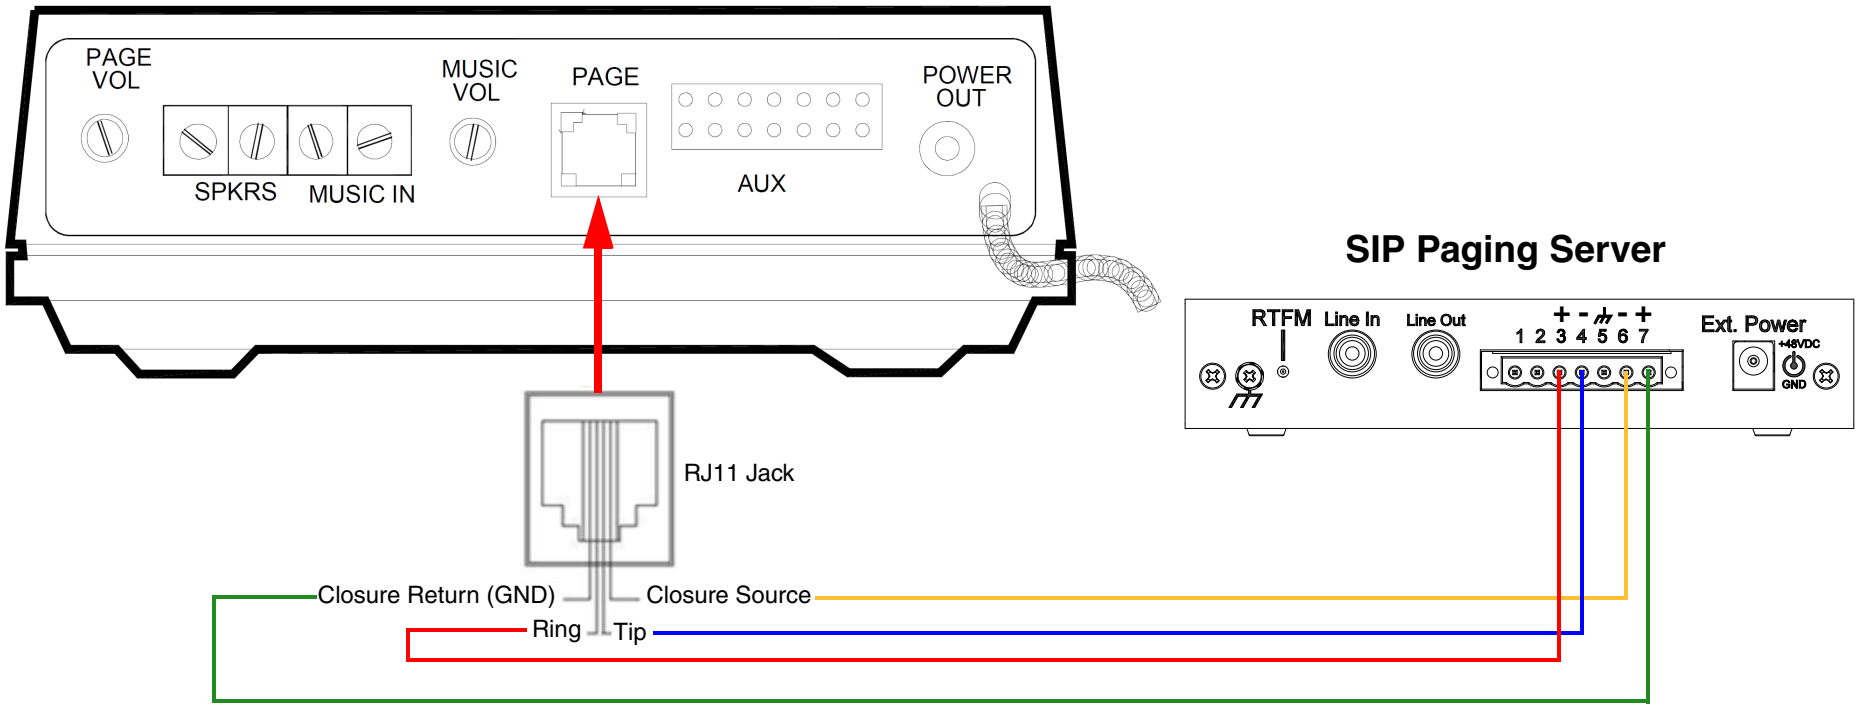

Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output[a]
4	Negative 600-Ohm Audio Output[a]
5	Audio Ground Reference.
6	Relay Contact - Common[b]
7	Relay Contact - Normally Open[b]

a.The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.
b.1 Amp at 30 VDC for continuous loads.

Notes:

The connection will use the Tip and Ring output and the relay contact closure contacts. This will require an RJ11 jack.

Check the box for the **Enable Relay on Local Audio** setting on the **Device Configuration** page.

2-conductor, shielded speaker wire is recommended.