





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

Bogen Platinum Series (PS60, PS120, PS240, PS600) Amplifier

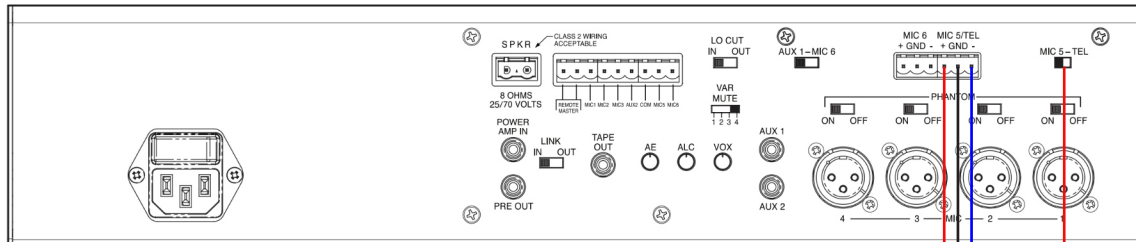

SIP Paging Adapter Connections

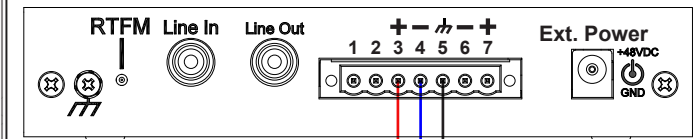

MIC 5 - TEL is set to the TEL position



Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

Ensure the switch for **MIC 5 - TEL** is set to the **TEL** position
2 conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.