







Installing the Conduit Speaker Mount

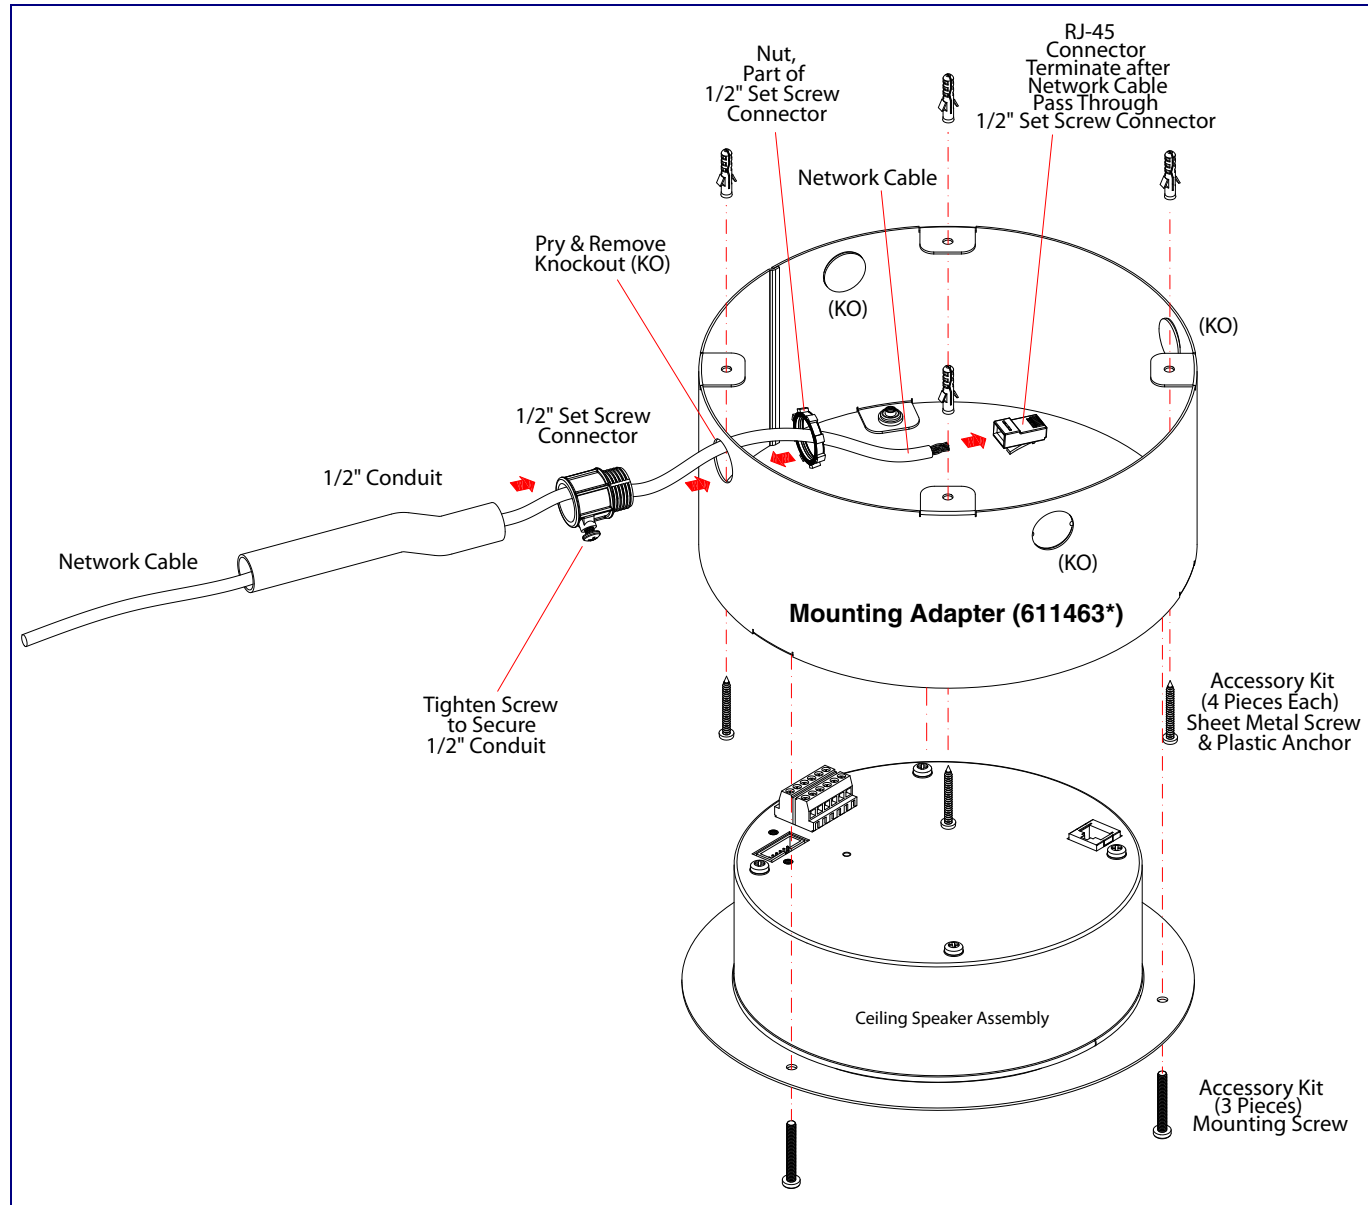

Ceiling Speaker 1/2-inch Conduit Entry Mount 011039

The Conduit Speaker Mount is an adapter that is built for a CyberData Ceiling speaker.

Parts

Accessory Kit	Comes with the Ceiling Speaker Accessory Kit	Not Provided
(4) #6 x 1.25-inch Sheet Metal Screw	(3) #8 x 1.25-inch PanHead Phillips Machine Screw (Mounting Screw)	(1) 0.5-inch EMT Set Screw Connector
		
(4) Size 6 Plastic Anchor		(1) 0.5-inch EMT Conduit
		

Procedure

To install the Conduit Speaker Mount:

1. Use the template to mark the hole locations on the ceiling.
2. Drill holes on the ceiling.
3. Insert the size #6 plastic anchor into the pre-drilled holes.
4. Line up the mounting adapter (part #611463*) and install the #6 sheet metal screws.
5. Tighten the sheet metal screws to secure the mounting adapter.
6. Line up the ceiling speaker assembly to the mounting adapter.
7. Install the size #8 Pan Head Phillips Machine Screws (mounting screw).
8. Tighten the mounting screw to secure the ceiling speaker to the mounting adapter.

Contacting CyberData

Corporate Headquarters

CyberData Corporation
3 Justin Court
Monterey, CA 93940, USA

Phone: 831-373-2601
Fax: 831-373-4193
<http://www.cyberdata.net/>

Sales: (831) 373-2601 ext. 334
Support: 831-373-2601 ext. 333
Support Website: <http://support.cyberdata.net/>
RMA Department: (831) 373-2601 ext. 136
RMA Email: RMA@CyberData.net
RMA Status: <http://support.cyberdata.net/>
Warranty Information: <http://support.cyberdata.net/>

