

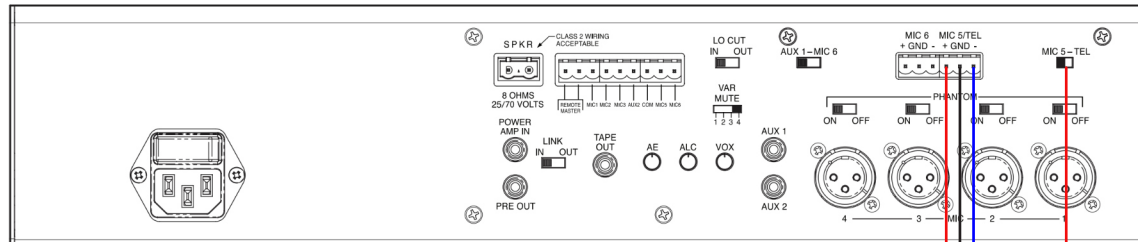


Caution
Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

Bogen Platinum Series (PS60, PS120, PS240, PS600) Amplifier

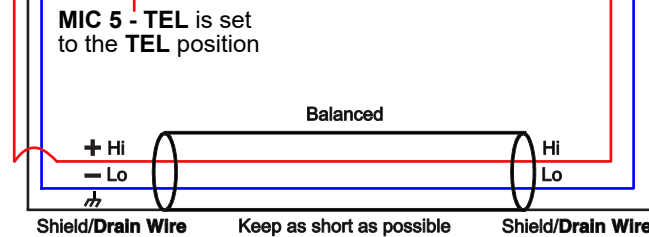

InformaCast Enabled Paging Adapter

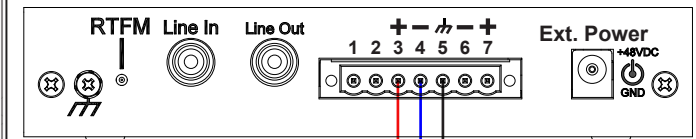

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

Ensure the switch for **MIC 5 - TEL** is set to the **TEL** position
 2 conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.